

TOSHIBA



TOSHIBA LIGHT COMMERCIAL SYSTEMS

Providing endless possibilities

2025

TABLE OF CONTENTS

| | |
|------------------------------|----|
| Toshiba Technology | 04 |
| Digital Inverter [DI] | 06 |
| Super Digital Inverter [SDI] | 08 |
| Compact 4-Way Cassette 4-Way | 10 |
| Cassette | 12 |
| High Wall | 14 |
| Mid-Static Ducted | 16 |
| High Static Ducted | 18 |
| Under Ceiling | 20 |
| Controls | 22 |

WHY CHOOSE TOSHIBA AIR CONDITIONERS?

Being comfortable in your environment means much more than controlling the temperature. Toshiba air conditioners are designed for flexibility in application with low operating noise and improved air quality, and above all, reliability. So, you get all year-round comfort plus accurate temperature control.

FLEXIBLE RANGE

Whether you are looking to cool a small bedroom or an office boardroom, the range of Toshiba's residential air conditioning solutions is ideal for all areas of your home or office. From wall-mounted split systems to inverter ducted systems or under-ceiling systems, Toshiba has a wide variety of heating and cooling solutions to suit your requirements.

AFTER SALES SERVICE

Problems tend to happen when you least expect them. Our in-house technical support team is unlike any other, and it's easy to know why.

You can count on our in-house technical support to assist you with anything you may need. We take this duty very seriously, so you can rest assured you will have dependable, ongoing support every time.

PEACE OF MIND

At Toshiba, we are confident our heat pumps can withstand any conditions of the New Zealand climate, which is why we offer a 5-year warranty across our entire range of air conditioning products, New Zealand-wide for all residential applications.

REDUCING GWP WITH R32

Our world is as precious as it is delicate; it's our responsibility to help take care of it.

Air conditioners circulate refrigerants to cool and heat air. Recently, some of these gases have been linked with environmental issues such as ozone depletion and climate change.

Choosing the right refrigerant requires consideration of all related issues and a holistic approach. It needs to be safe, but it also needs to be economical, efficient, and environmentally responsible.

R32 systems are more efficient as they require less refrigerant than R410a systems and because R32 is not mixed with other refrigerants, it can be recycled.

Using R32, we offer a better refrigerant combined with Toshiba's renowned high-level of performance and efficiency.

GWP = Global Warming Potential



TOSHIBA'S TWIN ROTARY COMPRESSOR

Toshiba's Twin Rotary compressor brings outstanding performance without compromising on system reliability.

TWIN ROTARY COMPRESSOR

Our proprietary Toshiba Twin Rotary compressor and inverter provide optimum control for maximising performance efficiency. With a rotor in each compression chamber, Toshiba Twin Rotary compressor systems are compact, lightweight, and low vibration while requiring less space for installation.

DLC TREATMENT

Toshiba's Diamond Like Carbon coating technology is unique to Toshiba's compressors.

It covers the wear surfaces on compression vanes for outstanding hardness and wear resistance, enhancing both the compressor's performance and durability.

TOSHIBA TECHNOLOGY

PAM

Pulse Amplitude Modulation [PAM] is a technology that controls the current waveform so that it resembles the supply voltage wave, thereby reducing loss and realising more efficient use of electricity.

With a PAM inverter, the voltage delivered to the compressor can be increased as needed, resulting in increased rotation speed.

Using PAM control, 98% of the input power supply is used effectively.

PWM

Pulse Width Modulation [PWM] helps to balance the compressor speed revolution, either higher speed when providing fast cooling, or slow speed when maintaining room temperature resulting in significantly reduced consumption.

INVERTER CONTROL

The inverter component allows for the Toshiba outdoor unit to vary its speed and output to match the required capacity of the indoor unit. Thus, the unit can achieve 30% more operating efficiency than conventional models and therefore, is more economical to run.



COMMITTED TO DEVELOPMENT & COMFORT

ABSOLUTE COMFORT

Toshiba's commitment to society drives a company-wide focus on attention to details through every stage of the development process, from design to user field tests, installations using our products and systems therefore featuring higher standard of indoor air quality, sound levels and energy savings when compared to its predecessors.

DIGITAL INVERTER

GM SERIES

A full range of Toshiba R32 light commercial systems are now available with Digital Inverter combinations to suit an array of application types, whether it be for residential or commercial spaces.

The technology of the Digital Inverter control module ensures optimised reproduction of the supply sine wave at the desired frequency in order to reduce inefficient harmonics that inverters normally emit.








With this innovative control method, Toshiba's Digital Inverter brings state-of-the-art inverter technology to its light commercial range, offering considerable advantages from wide capacity range, energy efficiencies to optimised comfort.

COMPACT CHASSIS

Single fan outdoor units are available from 2.5kw through to 12.5kw with a compact height of less than 900mm, making them an ideal unit for commercial applications where space may be a constraint. Being compact also enables these units to be double stacked without compromising on performance.



DIGITAL INVERTER [DI] LINE-UP

| | DIGITAL INVERTER [DI] | | | | | | |
|----------------------|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |
| SINGLE PHASE OUTDOOR | RAV-GM301ATP-A | RAV-GM401ATP-A | RAV-GM561ATP-A | RAV-GM801ATP-A | RAV-GM1101ATP-A | RAV-GM1401ATP-A | RAV-GM1601ATP-A |
| THREE PHASE OUTDOOR | - | - | - | - | - | - | - |

| | COMPACT 4-WAY CASSETTE | | | | | | |
|---|------------------------|----------------|----------------|-----|-----|-----|-----|
|  | RAV-RM301MUT-E | RAV-RM401MUT-E | RAV-RM561MUT-E | N/A | N/A | N/A | N/A |

| | 4-WAY CASSETTE | | | | | | |
|---|----------------|-----|----------------|----------------|-----------------|-----------------|-----------------|
|  | N/A | N/A | RAV-GM561UTP-A | RAV-GM801UTP-A | RAV-GM1101UTP-A | RAV-GM1401UTP-A | RAV-GM1601UTP-A |

| | HIGH WALLS | | | | | | |
|--|------------------|------------------|------------------|------------------|-----|-----|-----|
|  | RAV-GM301K RTP-A | RAV-GM401K RTP-A | RAV-GM561K RTP-A | RAV-GM801K RTP-A | N/A | N/A | N/A |

| | MID-STATIC DUCTED | | | | | | |
|---|-------------------|-----|----------------|----------------|-----------------|-----------------|-----------------|
|  | N/A | N/A | RAV-GM561BTP-A | RAV-GM801BTP-A | RAV-GM1101BTP-A | RAV-GM1401BTP-A | RAV-GM1601BTP-A |

| | HIGH STATIC DUCTED | | | | | | |
|---|--------------------|-----|----------------|----------------|-----------------|-----------------|-----------------|
|  | N/A | N/A | RAV-GM561DTP-A | RAV-GM801DTP-A | RAV-GM1101DTP-A | RAV-GM1401DTP-A | RAV-GM1601DTP-A |

| | UNDER CEILING | | | | | | |
|---|---------------|-----|----------------|----------------|-----------------|-----------------|-----------------|
|  | N/A | N/A | RAV-GM561CTP-A | RAV-GM801CTP-A | RAV-GM1101CTP-A | RAV-GM1401CTP-A | RAV-GM1601CTP-A |

| | DIGITAL INVERTER [DI] | |
|---------------------|---|---|
| |  |  |
| THREE PHASE OUTDOOR | RAV-GM2241AT8-A | RAV-GM2801AT8-A |

| | HIGH STATIC DUCTED | |
|---|--------------------|------------------|
|  | RAV-RM2241DTP-E2 | RAV-RM2801DTP-E2 |

SUPER DIGITAL INVERTER

GP SERIES

The expectations of a modern air conditioning system have evolved over the past years. Today, advanced comfort goes hand in hand with reduced energy and maintenance costs, combined with maximised simplicity and true operational flexibility.

The Super Digital Inverter encapsulates all of Toshiba's innovative spirit and outstanding expertise to create highly efficient solutions with maximum end user comfort at its core.

Toshiba Super Digital air conditioners combine economy and ecology in a compact body. They feature Toshiba's state-of-the-art technology, flexible control, and easy installation to bring natural comfort and convenience to any home or business environment.

PIPING FLEXIBILITY

Toshiba's Super Digital Inverter series supports height differences of up to 30 meters on a single system, which is enough height to cover an eight-storey building.

The SDI series also boasts up to 75 meters of allowable pipe run, increasing installation flexibility, making it possible to use in just about any application.

630mm



RAV-GP561- 5.6kW

890mm



RAV-GP801- 8.0kW

1340mm



RAV-GP1101 - 11.2kW
RAV-GP1401- 14.0kW
RAV-GP1601- 16.0kW

ECO-DRIVING DC TWIN ROTARY

High efficiency heat-transfer

Heat-transfer tube with improved heat-transfer coefficient.

DC fan motor


Highly efficient DC Motor.

Bat wing fan

Newly development for high-pressure low-volume fan.


Wide-flow grille

Optimising ventilation performance, bringing out the full effect of fan and motor.

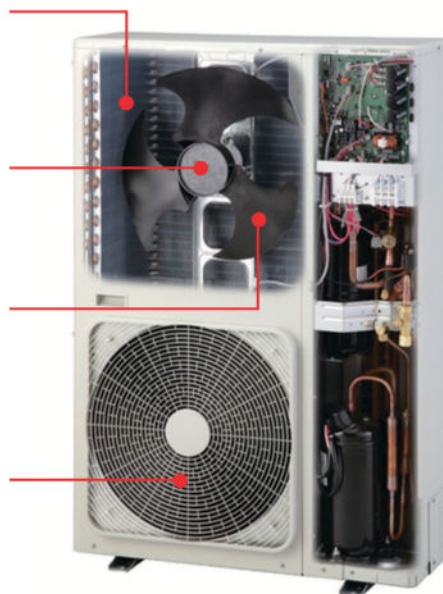

PIPING FLEXIBILITY

A low minimum speed of 10 rps has been achieved. This has further improved the operating efficiency when the load is low.

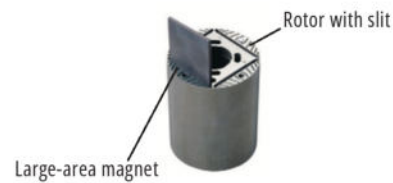

The structure and shape of each compressor component have been optimised. The area of the rotor magnet has been increased and a slit introduced to the design. These improvements have further enhanced efficiency and reduced noise.

SUPER DIGITAL INVERTER [SDI]

| | | | | | |
|----------------------|----------------|----------------|------------------|------------------|------------------|
| | | | | | |
| SINGLE PHASE OUTDOOR | RAV-GP561ATP-A | RAV-GP801ATP-A | RAV-GP1101ATP-A | RAV-GP1401ATP-A | RAV-GP1601ATP-A |
| THREE PHASE OUTDOOR | | | RAV-GP1101AT8P-A | RAV-GP1401AT8P-A | RAV-GP1601AT8P-A |

4-WAY CASSETTE

| | | | | | |
|--|----------------|----------------|-----------------|-----------------|-----------------|
| | RAV-GM561UTP-A | RAV-GM801UTP-A | RAV-GM1101UTP-A | RAV-GM1401UTP-A | RAV-GM1601UTP-A |
|--|----------------|----------------|-----------------|-----------------|-----------------|

HIGH WALLS

| | | | | | |
|--|-----------------|-----------------|-----|-----|-----|
| | RAV-GM561KRTP-A | RAV-GM801KRTP-A | N/A | N/A | N/A |
|--|-----------------|-----------------|-----|-----|-----|

MID-STATIC DUCTED

| | | | | | |
|--|----------------|----------------|-----------------|-----------------|-----------------|
| | RAV-GM561BTP-A | RAV-GM801BTP-A | RAV-GM1101BTP-A | RAV-GM1401BTP-A | RAV-GM1601BTP-A |
|--|----------------|----------------|-----------------|-----------------|-----------------|

HIGH STATIC DUCTED

| | | | | | |
|--|----------------|----------------|-----------------|-----------------|-----------------|
| | RAV-GM561DTP-A | RAV-GM801DTP-A | RAV-GM1101DTP-A | RAV-GM1401DTP-A | RAV-GM1601DTP-A |
|--|----------------|----------------|-----------------|-----------------|-----------------|

UNDER CEILING

| | | | | | |
|--|----------------|----------------|-----------------|-----------------|-----------------|
| | RAV-GM561CTP-A | RAV-GM801CTP-A | RAV-GM1101CTP-A | RAV-GM1401CTP-A | RAV-GM1601CTP-A |
|--|----------------|----------------|-----------------|-----------------|-----------------|

COMPACT 4-WAY CASSETTE

PERFECT FOR GRID SYSTEM CEILING


This compact unit (575 x 575 mm) fits perfectly into ceilings and matches standard architectural modules, without the need to cut ceiling tiles.

COMFORT

Individual louver control enables airflow to be chosen according to user preferences. The angles of each louver can be set individually in 3 different choices of swing patterns; Standard swing, Diagonally opposite swing and Turn-around swing


EASE OF INSTALLATION & MAINTENANCE

The slim flat stylish panel design is only 270 mm in height even when an electrical box is located inside the unit. Easy access to electrical box is achieved by simply removing the suction grill.

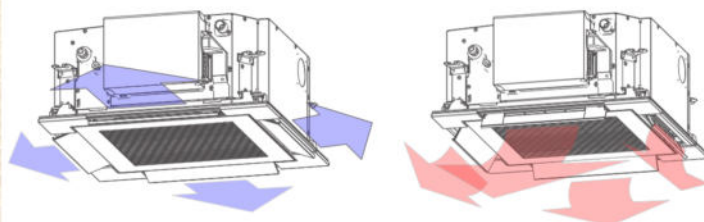

BUILT-IN CONDENSATE DRAIN PUMP

Equipped with a built-in drain pump with a pressure lift of 850mm, increasing flexibility and installation speed.

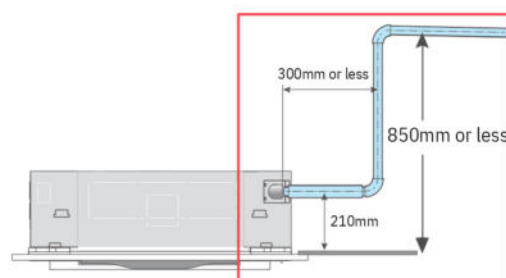

SELF CLEAN MODE

The unit dries internally by running on FAN operation once normal cycle has ceased, allowing the unit to be kept clean and reducing the built up of allergens, dust and odours.

COMPACT 4-WAY CASSETTE SPECIFICATIONS

| INDOOR UNIT | | RAV-RM301MUT-E | RAV-RM401MUT-E | RAV-RM561MUT-E |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GM301ATP-A | RAV-GM401ATP-A | RAV-GM561ATP-A |
| Cooling Capacity Range | kW | 2.50 [0.90 - 3.00] | 3.60 [0.90 - 4.00] | 5.00 [1.50 - 5.60] |
| Heating Capacity Range | kW | 3.40 [0.80 - 4.50] | 4.00 [0.80 - 5.00] | 5.30 [1.50 - 6.30] |
| EER | | 4.24 | 4.00 | 3.23 |
| COP | | 4.47 | 4.00 | 5.30 |
| Maximum Operating Current | A | 7.90 | 9.20 | 15.50 |
| Dimensions - Indoor [H x W x D] | | 256 x 575 x 575 | 256 x 575 x 575 | 256 x 575 x 575 |
| Dimensions - Outdoor [H x W x D] | mm | 550 x 780 x 290 | 550 x 780 x 290 | 550 x 780 x 290 |
| Dimensions - Panel [H x W x D] | | 12 x 620 x 620 | 12 x 620 x 620 | 12 x 620 x 620 |
| Weight - Indoor / Outdoor / Panel | kg | 15 / 29 / 2.5 | 15 / 34 / 2.5 | 15 / 40 / 2.5 |
| Airflow [H / M / L] | l/s | 177 / 144 / 122 | 183 / 169 / 153 | 221 / 186 / 151 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 38 / 47 | 41 / 50 | 44 / 48 |
| Operating Range Cooling | | -15 to 46 | -15 to 46 | -15 to 46 |
| Operating Range Heating | °C db | -15 to 15 | -15 to 15 | -15 to 15 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 9.52 | 6.35 / 12.70 | 6.35 / 12.70 |
| Maximum Pipe Length / Lift | m | 20 / 10 | 20 / 10 | 30 / 30 |
| Maximum Pre-charged Length | | 15 | 15 | 20 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

Refer to the Engineering Databook for details on these conditions and requirements.

Rate conditions: Cooling: Indoor 27 °C Dry Bulb / 19 °C Wet Bulb, Outdoor 35 °C Dry Bulb.

Heating: Indoor 20 °C Dry Bulb, Outdoor 7 °C Dry Bulb / 6 °C Wet Bulb.

Base on equivalent piping length of 7.5m and piping height difference of 0m.

CONTROLS OPTIONS



BACKLIT WIRED CONTROLLER
RBC-AMSU51-ES

The ultimate local controller with a built-in 7-day timer, large screen, and an easy-to-use menu.

FUNCTIONS:

On / Off
Schedule Timer
Holiday Mode
Dual Set Point
Energy-Saving Operation
Night Operation (only with models equipped with the function)
Temperature Increments of 1.5°C
Fault Code



COMPACT WIRED CONTROLLER
RBC-ASC11E / RBC-ASCU11-E

Back to basics with this remote controller offering all the standard functionalities in compact dimensions and with a large screen.

FUNCTIONS:

On / Off
Operation mode
Temperature setting
Fan speed
Louvers
Fault codes
Unit setup



WIRELESS CONTROLLER KIT
RBC-AXU31UM-E

The wireless infrared remote controller kit features an easy to use and compact button layout along with standard control buttons.

FUNCTIONS:


On / Off
Operation mode
Temperature setting
Fan speed
Louvers

4-WAY CASSETTE


SMART AIRFLOW

Individual louver control enables airflow to be chosen according to user preferences. The angles of each louver can be set individually in three different choices of swing patterns; Standard swing, Dual swing, and Cyclic swing.


STANDARD SWING



CYCLIC SWING

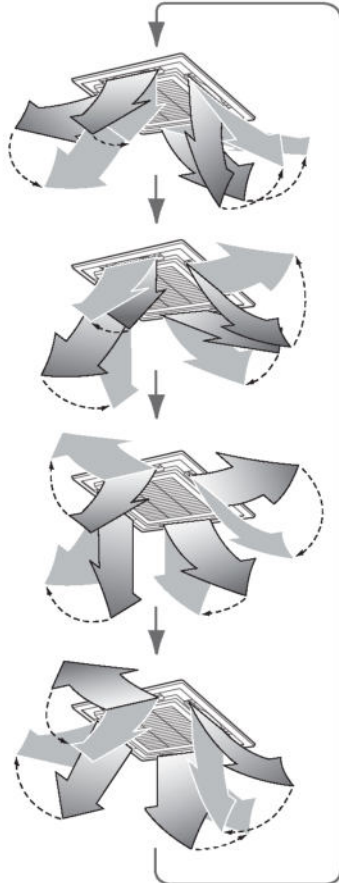


DUAL SWING

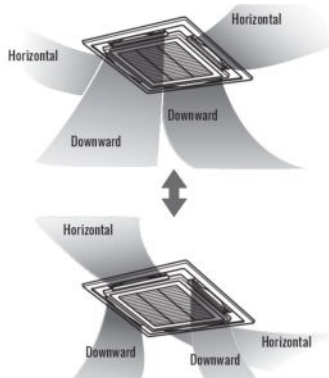


BUILT-IN CONDENSATE DRAIN PUMP

Equipped with a built-in drain pump with a pressure lift of 850mm, increasing flexibility and installation speed.

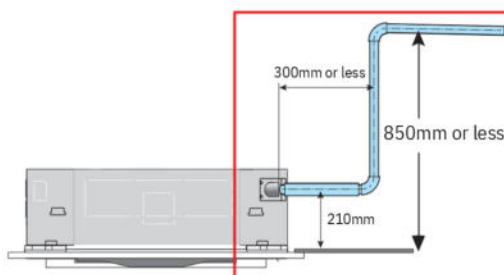

STANDARD TO HIGH CEILING APPLICATIONS

Toshiba 4-Way Cassettes are designed for standard to high ceiling applications.

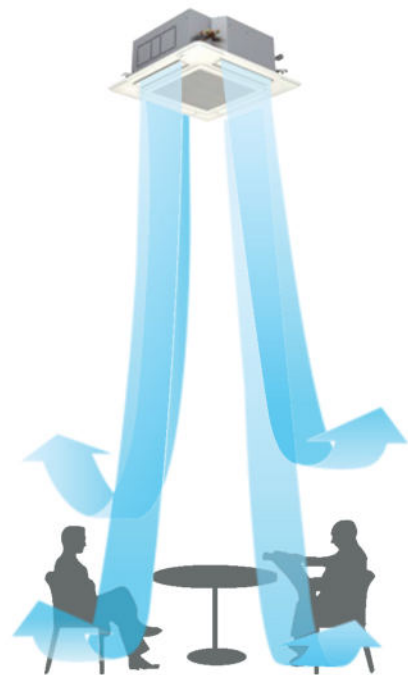

POWER SAVING

Set limits that restrict power consumption and reduce power bills.

Power consumption is given first priority, and limits maximum power consumption of the unit.

SELF CLEAN MODE

The unit dries internally by running on FAN operation once normal cycle has ceased, allowing the unit to be kept clean and reducing the built up of allergens, dust and odours.

4-WAY CASSETTE

SPECIFICATIONS

DIGITAL INVERTER [DI]

| INDOOR UNIT | | RAV-GM561UTP-A | RAV-GM801UTP-A | RAV-GM1101UTP-A | RAV-GM1401UTP-A | RAV-GM1601UTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GM561ATP-A | RAV-GM801ATP-A | RAV-GM1101ATP-A | RAV-GM1401ATP-A | RAV-GM1601ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.5 - 5.6] | 7.1 [1.5 - 8.0] | 10.0 [3.0 - 11.2] | 12.5 [3.0 - 14.0] | 14.0 [3.0 - 16.0] |
| Heating Capacity Range | kW | 5.3 [1.5 - 6.3] | 8.0 [1.5 - 9.0] | 11.2 [3.0 - 13.0] | 14.0 [3.0 - 16.0] | 16.0 [3.0 - 18.0] |
| EER | | 3.50 | 3.60 | 3.50 | 3.20 | 3.20 |
| COP | | 4.31 | 3.81 | 4.00 | 3.76 | 3.65 |
| Maximum Operating Current | A | 15.50 | 17.00 | 22.80 | 26.00 | 29.00 |
| Dimensions - Indoor [H x W x D] | | 256 x 840 x 840 | 256 x 840 x 840 | 319 x 840 x 840 | 319 x 840 x 840 | 319 x 840 x 840 |
| Dimensions - Outdoor [H x W x D] | mm | 550 x 780 x 290 | 630 x 800 x 300 | 890 x 900 x 320 | 890 x 900 x 320 | 1340 x 900 x 320 |
| Dimensions - Panel [H x W x D] | | 30 x 950 x 950 | 30 x 950 x 950 | 30 x 950 x 950 | 30 x 950 x 950 | 30 x 950 x 950 |
| Weight - Indoor / Outdoor / Panel | kg | 20 / 40 / 4.2 | 20 / 47 / 4.2 | 24 / 64 / 4.2 | 24 / 68 / 4.2 | 24 / 97 / 4.2 |
| Airflow [H / M / L] | l/s | 291 / 240 / 216 | 341 / 266 / 225 | 597 / 416 / 350 | 638 / 511 / 416 | 638 / 511 / 416 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 32 / 48 | 35 / 51 | 47 / 55 | 48 / 57 | 48 / 57 |
| Operating Range Cooling | °C db | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 |
| Operating Range Heating | | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | | 30 / 30 | 50 / 30 | 50 / 30 | 50 / 30 | 50 / 30 |
| Maximum Pre-charged Length | m | 20 | 20 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI] - SINGLE PHASE

| INDOOR UNIT | | RAV-GM561UTP-A | RAV-GM801UTP-A | RAV-GM1101UTP-A | RAV-GM1401UTP-A | RAV-GM1601UTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP561ATP-A | RAV-GP801ATP-A | RAV-GP1101ATP-A | RAV-GP1401ATP-A | RAV-GP1601ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.2 - 6.0] | 7.1 [1.9 - 8.0] | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] |
| Heating Capacity Range | kW | 5.6 [0.9 - 8.1] | 8.0 [1.5 - 11.3] | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] |
| EER | | 4.10 | 4.00 | 4.00 | 3.65 | 3.23 |
| COP | | 4.63 | 4.20 | 4.65 | 4.11 | 3.74 |
| Maximum Operating Current | A | 13.10 | 15.80 | 29.00 | 29.00 | 29.00 |
| Dimensions - Indoor [H x W x D] | | 256 x 840 x 840 | 256 x 840 x 840 | 319 x 840 x 840 | 319 x 840 x 840 | 319 x 840 x 840 |
| Dimensions - Outdoor [H x W x D] | mm | 630 x 800 x 300 | 890 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 |
| Dimensions - Panel [H x W x D] | | 30 x 950 x 950 | 30 x 950 x 950 | 30 x 950 x 950 | 30 x 950 x 950 | 30 x 950 x 950 |
| Weight - Indoor / Outdoor / Panel | kg | 20 / 43 / 4.2 | 20 / 67 / 4.2 | 24 / 102 / 4.2 | 24 / 102 / 4.2 | 24 / 102 / 4.2 |
| Airflow [H / M / L] | l/s | 291 / 240 / 216 | 341 / 266 / 225 | 597 / 416 / 350 | 638 / 511 / 416 | 638 / 511 / 416 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 32 / 48 | 35 / 52 | 47 / 51 | 48 / 53 | 48 / 58 |
| Operating Range Cooling | °C db | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 |
| Operating Range Heating | | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | | 50 / 30 | 50 / 30 | 75 / 30 | 75 / 30 | 75 / 30 |
| Maximum Pre-charged Length | m | 20 | 30 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI] - THREE PHASE

| INDOOR UNIT | | RAV-GM1101UTP-A | RAV-GM1401UTP-A | RAV-GM1601UTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP1101AT8P-A | RAV-GP1401AT8P-A | RAV-GP1601AT8P-A |
| Cooling Capacity Range | kW | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] |
| Heating Capacity Range | kW | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] |
| EER | | 4.31 | 3.65 | 3.23 |
| COP | | 4.65 | 4.11 | 3.72 |
| Maximum Operating Current | A | 16.50 | 16.50 | 16.50 |
| Dimensions - Indoor [H x W x D] | | 256 x 840 x 840 | 256 x 840 x 840 | 319 x 840 x 840 |
| Dimensions - Outdoor [H x W x D] | mm | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 |
| Dimensions - Panel [H x W x D] | | 30 x 950 x 950 | 30 x 950 x 950 | 30 x 950 x 950 |
| Weight - Indoor / Outdoor / Panel | kg | 24 / 100 / 4.2 | 24 / 100 / 4.2 | 24 / 100 / 4.2 |
| Airflow [H / M / L] | l/s | 291 / 240 / 216 | 341 / 266 / 225 | 597 / 416 / 350 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 32 / 51 | 35 / 53 | 47 / 58 |
| Operating Range Cooling | °C db | -15 to 52 | -15 to 52 | -15 to 52 |
| Operating Range Heating | | -20 to 24 | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | | 75 / 30 | 75 / 30 | 75 / 30 |
| Maximum Pre-charged Length | m | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz |

Refer to the Engineering Databook for details on these conditions and requirements.

Rate conditions: Cooling: Indoor 27 °C Dry Bulb / 19 °C Wet Bulb, Outdoor 35 °C Dry Bulb.

Heating: Indoor 20 °C Dry Bulb, Outdoor 7 °C Dry Bulb / 6 °C Wet Bulb.

Base on equivalent piping length of 7.5m and piping height difference of 0m.

HIGH WALLS

SELF CLEANING FUNCTION

Toshiba's self-cleaning function is designed to reduce the humidity that causes mold to form inside an air-conditioning unit. 20 minutes of fan operation after shut down dries the moist air and helps reduce mold formation on the heat exchanger coils.

OPTIMUM AIR DISTRIBUTION

70° directional Auto-swing louver mode allows optimum air distribution throughout the room. Total comfort is granted, thanks also to Automatic air volume control and Automatic cooling/heating.

ON AND OFF TIMER

Schedule the unit to turn ON / OFF at designated times using the wireless controller.

Start the air conditioner when you enter your office and stop it when its time to head home, this setting can be applied for the same time, every day.

HI POWER MODE

The HI POWER mode automatically controls room temperature, airflow and operation mode so that, the room is quickly cooled in summer and warmed in winter.

Normal Operation

Moisture stays trapped inside




Self-cleaning Function

20 minutes of fan operation after shut down dries the moist air and helps reduce mold formation on heat exchanger coils.




Cooling mode 10°~45°

Heating mode 10°~70°



(Approximate Data)

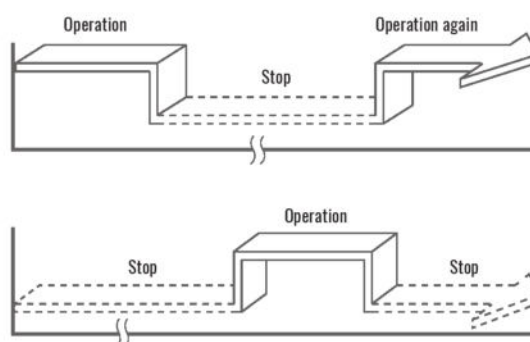

ENJOY COMFORT IN SILENCE

Get quiet system operation by selecting the "QUIET" mode to automatically set the fan speed to the lowest speed.

HIGH WALLS SPECIFICATIONS



DIGITAL INVERTER [DI]

| INDOOR UNIT | | RAV-GM301K RTP-A | RAV-GM401K RTP-A | RAV-GM561K RTP-A | RAV-GM801K RTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GM301ATP-A | RAV-GM401ATP-A | RAV-GM561ATP-A | RAV-GM801ATP-A |
| Cooling Capacity Range | kW | 2.5 [0.9 - 3.0] | 3.6 [0.9 - 4.0] | 5.0 [1.5 - 5.6] | 7.1 [1.5 - 8.0] |
| Heating Capacity Range | kW | 3.4 [0.8 - 4.5] | 4.0 [0.8 - 5.0] | 5.3 [1.5 - 6.3] | 8.0 [1.5 - 9.0] |
| EER | | 4.24 | 3.71 | 3.31 | 3.35 |
| COP | | 4.00 | 4.00 | 3.90 | 3.40 |
| Maximum Operating Current | A | 7.90 | 9.20 | 15.50 | 17.00 |
| Dimensions - Indoor [H x W x D] | mm | 293 x 798 x 230 | 293 x 798 x 230 | 320 x 1050 x 250 | 320 x 1050 x 250 |
| Dimensions - Outdoor [H x W x D] | mm | 550 x 780 x 290 | 550 x 780 x 290 | 550 x 780 x 290 | 630 x 800 x 300 |
| Weight - Indoor / Outdoor | kg | 10 / 29 | 10 / 34 | 14 / 40 | 14 / 47 |
| Airflow [H / M / L] | l/s | 186 / 150 / 125 | 194 / 161 / 125 | 266 / 230 / 188 | 288 / 252 / 188 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 40 / 47 | 41 / 50 | 42 / 48 | 45 / 51 |
| Operating Range Cooling | °C db | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 |
| Operating Range Heating | °C db | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 15 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 9.52 | 6.35 / 12.70 | 6.35 / 12.70 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 20 / 10 | 20 / 10 | 30 / 30 | 50 / 30 |
| Maximum Pre-charged Length | | 15 | 15 | 20 | 20 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI]

| INDOOR UNIT | | RAV-GM561K RTP-A | RAV-GM801K RTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP561ATP-A | RAV-GP801ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.2 - 6.0] | 7.1 [1.9 - 8.0] |
| Heating Capacity Range | kW | 5.6 [0.9 - 7.4] | 8.0 [1.5 - 10.6] |
| EER | | 3.97 | 3.90 |
| COP | | 4.00 | 3.60 |
| Maximum Operating Current | A | 13.10 | 15.80 |
| Dimensions - Indoor [H x W x D] | mm | 320 x 1050 x 250 | 320 x 1050 x 250 |
| Dimensions - Outdoor [H x W x D] | mm | 630 x 800 x 300 | 890 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 14 / 43 | 14 / 67 |
| Airflow [H / M / L] | l/s | 266 / 230 / 188 | 288 / 252 / 188 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 42 / 48 | 45 / 52 |
| Operating Range Cooling | °C db | -15 to 52 | -15 to 52 |
| Operating Range Heating | °C db | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 50 / 30 | 50 / 30 |
| Maximum Pre-charged Length | | 20 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

Refer to the Engineering Databook for details on these conditions and requirements.

Rate conditions: Cooling: Indoor 27 °C Dry Bulb / 19 °C Wet Bulb, Outdoor 35 °C Dry Bulb.

Heating: Indoor 20 °C Dry Bulb, Outdoor 7 °C Dry Bulb / 6 °C Wet Bulb.

Base on equivalent piping length of 7.5m and piping height difference of 0m.

CONTROLS OPTIONS



NEW WIRED CONTROLLER

RBC-AMSU52-ES



BACKLIT WIRED CONTROLLER

RBC-AMSU51-ES



COMPACT WIRED CONTROLLER

RBC-ASCU11-E



NEW WIFI MODULE

BMS-IWF0010UCP-E

MID-STATIC DUCTED

SEAMLESS DESIGN & INSTALLATION FLEXIBILITY

Toshiba ducted systems allow for a range of diffuser designs to best suit any decor.

Versatile and easy installation also made possible with the capability of adjusting the distance between the air intake and the air outlet vents to create the optimal airflow configuration.




Polygon Rooms



Polygon Rooms




Narrow Rooms



Rooms with fixtures and
obstacles

BUILT-IN DRAIN PUMP

The flexible piping layout is made possible by the built-in drain-pump kit that raises the drain piping up to 850mm from the drain port.

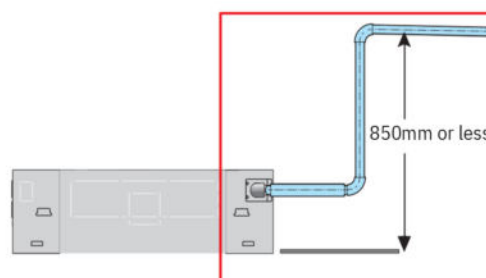

SPACE SAVING DESIGN

With a height of 275mm, the Toshiba mid-static ducted can be installed in almost any application including homes, apartments or commercial buildings.



WEEKLY TIMER

A hassle-free, intuitive management system via the wired controller. A fully programmable 7-day timer offers the ability to completely eliminate the need to manually control the air conditioner.

The weekly timer function enables users to preset the unit to automatically turn on and off or change the temperature to suit the user's weekly schedule.

The 7-day timer function allows the user to set up to eight ON/OFF and temperature settings for each day of the week.

* Feature available on model: RBC-AMSU51-ES

MID-STATIC DUCTED SPECIFICATIONS

DIGITAL INVERTER [DI]

| INDOOR UNIT | | RAV-GM561BTP-A | RAV-GM801BTP-A | RAV-GM1101BTP-A | RAV-GM1401BTP-A | RAV-GM1601BTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GM561ATP-A | RAV-GM801ATP-A | RAV-GM1101ATP-A | RAV-GM1401ATP-A | RAV-GM1601ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.5 - 5.6] | 7.1 [1.5 - 8.0] | 10.0 [3.0 - 11.2] | 12.5 [3.0 - 14.0] | 14.0 [3.0 - 16.0] |
| Heating Capacity Range | kW | 5.3 [1.5 - 6.3] | 8.0 [1.5 - 9.0] | 11.2 [3.0 - 13.0] | 14.0 [3.0 - 16.0] | 16.0 [3.0 - 18.0] |
| EER | | 3.31 | 3.60 | 3.36 | 3.10 | 3.20 |
| COP | | 3.71 | 4.00 | 4.00 | 3.60 | 3.50 |
| Maximum Operating Current | A | 15.50 | 17.00 | 22.80 | 26.00 | 29.00 |
| Dimensions - Indoor [H x W x D] | mm | 275 x 700 x 750 | 275 x 1000 x 750 | 275 x 1400 x 750 | 275 x 1400 x 750 | 275 x 1400 x 750 |
| Dimensions - Outdoor [H x W x D] | mm | 550 x 780 x 290 | 630 x 800 x 300 | 890 x 900 x 320 | 890 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 23 / 40 | 31 / 47 | 41 / 64 | 41 / 68 | 41 / 97 |
| Airflow [H / M / L] | l/s | 280 / 250 / 200 | 472 / 388 / 277 40 | 583 / 458 / 361 | 611 / 513 / 416 41 | 652 / 555 / 416 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 34 / 48 | / 51 | 40 / 55 | / 57 | 42 / 57 |
| Static Pressure | Pa | 30 - 180 | 30 - 180 | 50 - 200 | 50 - 200 | 50 - 200 |
| Operating Range Cooling | °C db | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 |
| Operating Range Heating | °C wb | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 30 / 30 | 50 / 30 | 50 / 30 | 50 / 30 | 50 / 30 |
| Maximum Pre-charged Length | | 20 | 20 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI] - SINGLE PHASE

| INDOOR UNIT | | RAV-GM561BTP-A | RAV-GM801BTP-A | RAV-GM1101BTP-A | RAV-GM1401BTP-A | RAV-GM1601BTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP561ATP-A | RAV-GP801ATP-A | RAV-GP1101ATP-A | RAV-GP1401ATP-A | RAV-GP1601ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.2 - 6.0] | 7.1 [1.9 - 8.0] | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] |
| Heating Capacity Range | kW | 5.6 [0.9 - 8.1] | 8.0 [1.5 - 11.3] | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] |
| EER | | 3.50 | 3.70 | 4.10 | 3.45 | 3.23 |
| COP | | 4.00 | 4.20 | 4.30 | 3.85 | 3.56 |
| Maximum Operating Current | A | 13.10 | 15.80 | 29.00 | 29.00 | 29.00 |
| Dimensions - Indoor [H x W x D] | mm | 275 x 700 x 750 | 275 x 1000 x 750 | 275 x 1400 x 750 | 275 x 1400 x 750 | 275 x 1400 x 750 |
| Dimensions - Outdoor [H x W x D] | mm | 630 x 800 x 300 | 890 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 23 / 43 | 31 / 62 | 41 / 102 | 41 / 102 | 41 / 102 |
| Airflow [H / M / L] | l/s | 280 / 250 / 200 | 472 / 388 / 277 | 583 / 458 / 361 | 611 / 513 / 416 41 | 652 / 555 / 416 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 38 / 48 | 40 / 52 | 40 / 51 | / 53 | 42 / 58 |
| Static Pressure | Pa | 30 - 180 | 30 - 180 | 50 - 200 | 50 - 200 | 50 - 200 |
| Operating Range Cooling | °C db | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 |
| Operating Range Heating | | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 50 / 30 | 50 / 30 | 75 / 30 | 75 / 30 | 75 / 30 |
| Maximum Pre-charged Length | | 20 | 30 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI] - THREE PHASE

| INDOOR UNIT | | RAV-GM1101BTP-A | RAV-GM1401BTP-A | RAV-GM1601BTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP1101AT8P-A | RAV-GP1401AT8P-A | RAV-GP1601AT8P-A |
| Cooling Capacity Range | kW | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] |
| Heating Capacity Range | kW | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] |
| EER | | 4.10 | 3.45 | 3.23 |
| COP | | 4.30 | 3.85 | 3.56 |
| Maximum Operating Current | A | 16.50 | 16.50 | 16.50 |
| Dimensions - Indoor [H x W x D] | mm | 275 x 1400 x 750 | 275 x 1400 x 750 | 275 x 1400 x 750 |
| Dimensions - Outdoor [H x W x D] | mm | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 41 / 100 | 320 41 / 100 | 41 / 100 |
| Airflow [H / M / L] | l/s | 583 / 458 / 361 | 611 / 513 / 416 | 652 / 555 / 416 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 40 / 51 | 41 / 53 | 42 / 58 |
| Static Pressure | Pa | 50 - 200 | 50 - 200 | 50 - 200 |
| Operating Range Cooling | °C db | -15 to 52 | -15 to 52 | -15 to 52 |
| Operating Range Heating | | -20 to 24 | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 75 / 30 | 75 / 30 | 75 / 30 |
| Maximum Pre-charged Length | | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz |

Refer to the Engineering Databook for details on these conditions and requirements.

Rate conditions: Cooling: Indoor 27 °C Dry Bulb / 19 °C Wet Bulb, Outdoor 35 °C Dry Bulb.

Heating: Indoor 20 °C Dry Bulb, Outdoor 7 °C Dry Bulb / 6 °C Wet Bulb.

Base on equivalent piping length of 7.5m and piping height difference of 0m.


HIGH-STATIC DUCTED

HIGH STATIC PRESSURE & AIRFLOW

Toshiba high static ducted systems provide a wide range of static pressure, allowing airflow to be directed to different areas of the home or office with ease.

With static pressure ranging from 50 to 270Pa and increased variation to airflow, ensures operation that suits most room layouts, making it an ideal system for cooling & heating multiple spaces.

* Fan curve illustration of model RAV-GM1401DTP-A

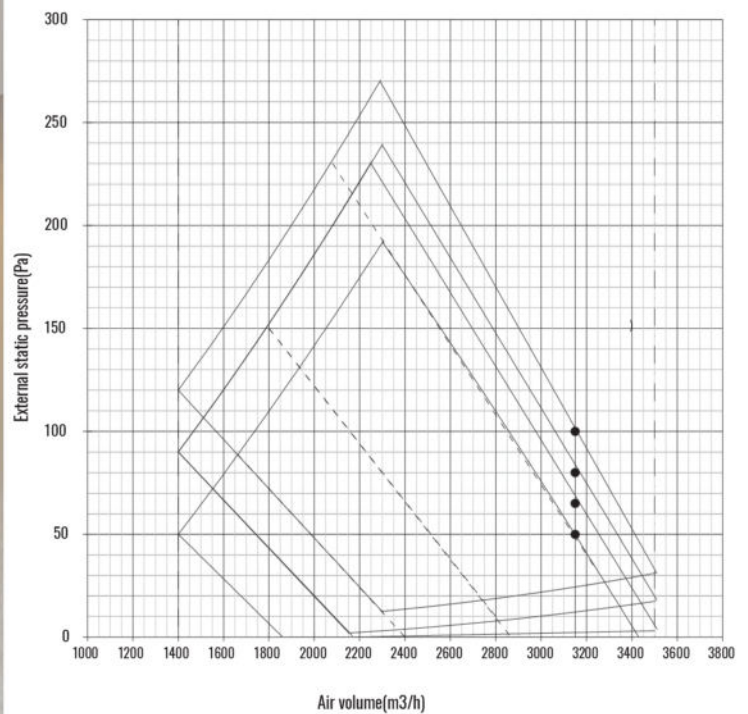

SEAMLESS DESIGN & INSTALLATION FLEXIBILITY


Toshiba high static ducted systems allow for a range of diffuser designs to best suit any decor.

Versatile and easy installation is also made possible with the capability of adjusting the distance between the air intake and the air outlet vents to create the optimal airflow configuration.

BUILT-IN DRAIN PUMP

The flexible piping layout is made possible by the built-in drain-pump kit that raises the drain piping up to 850mm from the drain port.

* Drain pump optional on the 20.0kW and 24.0kW indoor units

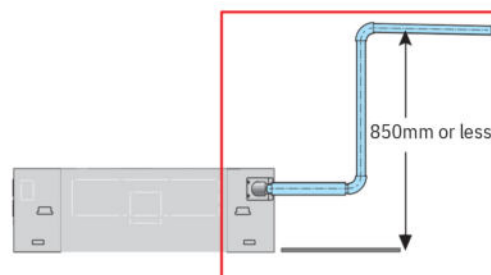

HIGH-STATIC DUCTED SPECIFICATIONS

DIGITAL INVERTER [DI]

| INDOOR UNIT | | RAV-GM561DTP-A | RAV-GM801DTP-A | RAV-GM1101DTP-A | RAV-GM1401DTP-A | RAV-GM1601DTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GM561ATP-A | RAV-GM801ATP-A | RAV-GM1101ATP-A | RAV-GM1401ATP-A | RAV-GM1601ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.5 - 5.6] | 7.1 [1.5 - 8.0] | 10.0 [3.0 - 11.2] | 12.5 [3.0 - 14.0] | 14.0 [3.0 - 16.0] |
| Heating Capacity Range | kW | 5.3 [1.5 - 6.3] | 8.0 [1.5 - 9.0] | 11.2 [3.0 - 13.0] | 14.0 [3.0 - 16.0] | 16.0 [3.0 - 18.0] |
| EER | | 3.36 | 3.90 | 3.30 | 3.20 | 3.20 |
| COP | | 4.31 | 4.00 | 4.00 | 3.61 | 3.86 |
| Maximum Operating Current | A | 15.50 | 17.00 | 22.80 | 26.00 | 29.00 |
| Dimensions - Indoor [H x W x D] | mm | 298 x 1000 x | 298 x 1000 x 750 | 298 x 1400 x 750 | 298 x 1400 x 750 | 298 x 1400 x 750 |
| Dimensions - Outdoor [H x W x D] | mm | 750 550 x 780 x | 630 x 800 x 300 | 890 x 900 x 320 | 890 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 290 34 / 40 | 34 / 47 | 42 / 64 | 42 / 68 | 42 / 97 |
| Airflow [H / M / L] | l/s | 388 / 333 / 277 | 583 / 430 / 361 | 805 / 694 / 466 | 875 / 716 / 569 49 | 972 / 902 / 597 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 36 / 48 | 41 / 51 | 48 / 55 | 50 / 57 | 50 / 57 |
| Static Pressure | Pa | 50 - 150 | 50 - 150 | 50 - 270 | 50 - 270 | 50 - 270 |
| Operating Range Cooling | °C db | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 |
| Operating Range Heating | °C wb | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 30 / 30 | 50 / 30 | 50 / 30 | 50 / 30 | 50 / 30 |
| Maximum Pre-charged Length | m | 20 | 20 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

DIGITAL INVERTER [DI] -

| INDOOR UNIT | | RAV-RM2241DTP-E2 | RAV-RM2801DTP-E2 |
|---------------------------------------|-------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GM2241AT8-A | RAV-GM2801AT8-A |
| Cooling Capacity Range | kW | 20.0 [4.6 - 22.4] | 24.0 [4.6 - 27.0] |
| Heating Capacity Range | kW | 22.4 [4.6 - 25.0] | 27.0 [4.6 - 31.5] |
| EER | | 3.23 | 3.01 |
| COP | | 3.92 | 3.59 |
| Maximum Operating Current | A | 18.00 | 23.00 |
| Dimensions - Indoor [H x W x D] | mm | 448 x 1400 x 900 | 448 x 1400 x 900 |
| Dimensions - Outdoor [H x W x D] | mm | 1550 x 1010 x 370 | 1550 x 1010 x 370 |
| Weight - Indoor / Outdoor | kg | 97 / 142 | 97 / 142 |
| Airflow [H / M / L] | l/s | 1055 / 888 / 694 | 1333 / 1166 / 972 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 44 / 60 | 46 / 63 |
| Static Pressure | Pa | 50 - 250 | 50 - 250 |
| Operating Range Cooling | °C db | -15 to 46 | -15 to 46 |
| Operating Range Heating | °C wb | -27 to 15 | -27 to 15 |
| Pipe Sizes (Liquid / Gas) | mm | 12.70 / 28.60 | 12.70 / 28.60 |
| Maximum Pipe Length / Lift | m | 100 / 30 | 100 / 30 |
| Maximum Pre-charged Length | m | 30 | 30 |
| Power Supply | Ph / V / Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz |

SUPER DIGITAL INVERTER [SDI]

| INDOOR UNIT | | RAV-GM561DTP-A |
|---------------------------------------|-------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP561ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.2 - 6.0] |
| Heating Capacity Range | kW | 5.6 [0.9 - 7.4] |
| EER | | 3.70 |
| COP | | 4.60 |
| Maximum Operating Current | A | 13.10 |
| Dimensions - Indoor [H x W x D] | mm | 298 x 1000 x 750 |
| Dimensions - Outdoor [H x W x D] | mm | 630 x 800 x 300 |
| Weight - Indoor / Outdoor | kg | 34 / 43 |
| Airflow [H / M / L] | l/s | 388 / 333 / 277 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 36 / 48 |
| Static Pressure | Pa | 50 - 150 |
| Operating Range Cooling | °C db | -15 to 52 |
| Operating Range Heating | °C wb | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 |
| Maximum Pipe Length / Lift | m | 50 / 30 |
| Maximum Pre-charged Length | m | 20 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI] -

Continued

| INDOOR UNIT | | RAV-GM801DTP-A | RAV-GM1101DTP-A | RAV-GM1401DTP-A | RAV-GM1601DTP-A | RAV-GM1101DTP-A | RAV-GM1401DTP-A | RAV-GM1601DTP-A |
|--------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP801ATP-A | RAV-GP1101ATP-A | RAV-GP1401ATP-A | RAV-GP1601ATP-A | RAV-GP1101AT8P-A | RAV-GP1401AT8P-A | RAV-GP1601AT8P-A |
| Cooling Capacity Range Heating | kW | 7.1 [1.5 - 8.0] | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] |
| Capacity Range | kW | 8.0 [1.5 - 11.3] | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] |
| EER | | 3.90 | 3.75 | 3.43 | 3.31 | 3.75 | 3.43 | 3.31 |
| COP | | 4.00 | 4.40 | 4.15 | 3.90 | 4.40 | 4.15 | 3.90 |
| Maximum Operating Current | A | 15.80 | 16.50 | 16.50 | 29.00 | 16.50 | 16.50 | 16.50 |
| Dimensions - In [H x W x D] | mm | 298 x 1000 x | 298 x 1400 x 750 | 298 x 1400 x 750 | 298 x 1400 x 750 | 298 x 1400 x 750 | 298 x 1400 x 750 | 298 x 1400 x 750 |
| Dimensions - Out [H x W x D] | mm | 750 890 x 900 x | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 320 31 / 62 | 42 / 100 | 42 / 100 | 42 / 102 | 42 / 100 | 42 / 100 | 42 / 100 |
| Airflow [H / M / L] | l/s | 472 / 388 / 277 | 805 / 694 / 466 | 875 / 716 / 569 | 972 / 902 / 597 | 805 / 694 / 466 | 875 / 716 / 569 | 972 / 902 / 597 |
| Sound Pressure Level [in/out] | dB(A) | 41 / 51 | 48 / 51 | 49 / 53 | 50 / 58 | 48 / 51 | 49 / 53 | 50 / 58 |
| Static Pressure | Pa | 30 - 180 | 50 - 270 | 50 - 270 | 50 - 270 | 50 - 270 | 50 - 270 | 50 - 270 |
| Operating Range Cooling | °C db | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 |
| Operating Range Heating | °C wb | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 50 / 30 | 75 / 30 | 75 / 30 | 75 / 30 | 75 / 30 | 75 / 30 | 75 / 30 |
| Maximum Pre-charged Length | m | 20 | 30 | 30 | 30 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz |

Refer to the Engineering Databook for details on these conditions and requirements.
 Rate conditions: Cooling: Indoor 27 °C Dry Bulb / 19 °C Wet Bulb, Outdoor 35 °C Dry Bulb.
 Heating: Indoor 20 °C Dry Bulb, Outdoor 7 °C Dry Bulb / 6 °C Wet Bulb.
 Base on equivalent piping length of 7.5m and piping height difference of 0m.

UNDER CEILING

SELF CLEANING FUNCTION

Toshiba's self-cleaning function is designed to reduce the humidity that causes mold to form inside an air-conditioning units. 20 minutes of fan operation after shut down dries the moist air and helps reduce mold formation on heat exchanger coils.

SMOOTH CURVES


Toshiba's new Under Ceiling units have adopted a more rounded and sleek chassis design to compliment any decor

OPTIONAL DRAIN PUMP

Reduce mold formation with the optional drain pump kit with built-in glass that aids in mold formation over time.


AIR CONTROL

The airflow angle is automatically set to the most suitable setting according to your cooling or heating needs, and an automatic swing mode enables airflow to reach all areas of the room to create a comfortable ambience.

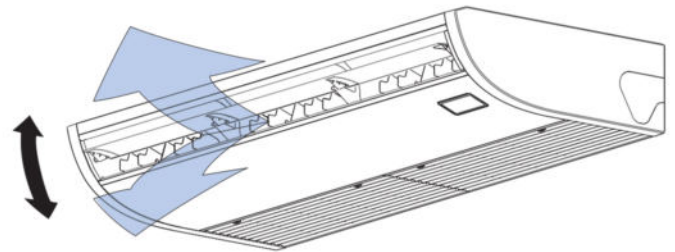

RE-DESIGNED WIDER FLAP

The new air outlet has been re-designed allowing for high noise reduction and increased air volume circulation compared to the previous series.

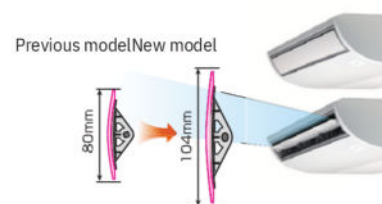

COMFORTABLE AMBIENCE

With the implementation of the improved fan design, the Toshiba under ceiling unit now has increased air volume circulation and reduced noise levels compared to the previous models.

Air throw can now extend up to 4.3m, creating comfortable spaces with reduced cold and hot spots.

UNDERCEILING SPECIFICATIONS

DIGITAL INVERTER [DI]

| INDOOR UNIT | | RAV-GM561CTP-A | RAV-GM801CTP-A | RAV-GM1101CTP-A | RAV-GM1401CTP-A | RAV-GM1601CTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GM561ATP-A | RAV-GM801ATP-A | RAV-GM1101ATP-A | RAV-GM1401ATP-A | RAV-GM1601ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.5 - 5.6] | 7.1 [1.5 - 8.0] | 10.0 [3.0 - 11.2] | 12.5 [3.0 - 14.0] | 14.0 [3.0 - 16.0] |
| Heating Capacity Range | kW | 5.3 [1.5 - 6.3] | 8.0 [1.5 - 9.0] | 11.2 [3.0 - 13.0] | 14.0 [3.0 - 16.0] | 16.0 [3.0 - 18.0] |
| EER | | 3.31 | 3.60 | 3.36 | 3.10 | 3.10 |
| COP | | 3.90 | 4.00 | 4.00 | 3.74 | 3.65 |
| Maximum Operating Current | A | 15.50 | 17.00 | 22.80 | 26.00 | 29.00 |
| Dimensions - Indoor [H x W x D] | mm | 235 x 950 x 690 | 235 x 1270 x 690 | 235 x 1586 x 690 | 235 x 1586 x 690 | 235 x 1586 x 690 |
| Dimensions - Outdoor [H x W x D] | mm | 550 x 780 x 290 | 630 x 800 x 300 | 890 x 900 x 320 | 890 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 23 / 47 | 29 / 47 | 37 / 64 | 37 / 68 | 37 / 97 |
| Airflow [H / M / L] | l/s | 250 / 200 / 150 | 391 / 277 / 208 41 | 516 / 375 / 283 44 | 566 / 425 / 333 | 566 / 458 / 350 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 37 / 48 | / 51 | / 55 | 46 / 57 | 46 / 57 |
| Operating Range Cooling | | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 | -15 to 46 |
| Operating Range Heating | °C db | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 15 | -15 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 30 / 30 | 50 / 30 | 50 / 30 | 50 / 30 | 50 / 30 |
| Maximum Pre-charged Length | | 20 | 20 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI] - SINGLE PHASE

| INDOOR UNIT | | RAV-GM561CTP-A | RAV-GM801CTP-A | RAV-GM1101CTP-A | RAV-GM1401CTP-A | RAV-GM1601CTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP561ATP-A | RAV-GP801ATP-A | RAV-GP1101ATP-A | RAV-GP1401ATP-A | RAV-GP1601ATP-A |
| Cooling Capacity Range | kW | 5.0 [1.2 - 6.0] | 7.1 [1.9 - 8.0] | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] |
| Heating Capacity Range | kW | 5.6 [0.9 - 7.4] | 8.0 [1.5 - 11.3] | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] |
| EER | | 3.70 | 4.36 | 4.15 | 3.60 | 3.40 |
| COP | | 4.38 | 4.30 | 4.40 | 4.05 | 3.72 |
| Maximum Operating Current | A | 13.10 | 15.80 | 29.00 | 29.00 | 29.00 |
| Dimensions - Indoor [H x W x D] | mm | 235 x 950 x 690 | 235 x 1270 x 690 | 235 x 1586 x 690 | 235 x 1586 x 690 | 235 x 1586 x 690 |
| Dimensions - Outdoor [H x W x D] | mm | 630 x 800 x 300 | 890 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 23 / 43 | 29 / 67 | 37 / 102 | 37 / 102 | 37 / 102 |
| Airflow [H / M / L] | l/s | 250 / 200 / 150 | 391 / 277 / 208 41 | 516 / 375 / 283 44 | 566 / 425 / 333 | 566 / 458 / 350 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | 37 / 48 | / 52 | / 51 | 46 / 53 | 46 / 58 |
| Operating Range Cooling | | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 | -15 to 52 |
| Operating Range Heating | °C db | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 6.35 / 12.70 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 50 / 30 | 50 / 30 | 75 / 30 | 75 / 30 | 75 / 30 |
| Maximum Pre-charged Length | | 20 | 30 | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz | 1ph / 220-240V / 50Hz |

SUPER DIGITAL INVERTER [SDI] - THREE PHASE

| INDOOR UNIT | | RAV-GM1101CTP-A | RAV-GM1401CTP-A | RAV-GM1601CTP-A |
|---------------------------------------|-------------|-----------------------|-----------------------|-----------------------|
| OUTDOOR UNIT | | RAV-GP1101AT8P-A | RAV-GP1401AT8P-A | RAV-GP1601AT8P-A |
| Cooling Capacity Range | kW | 10.0 [2.6 - 12.0] | 12.5 [2.6 - 14.0] | 14.0 [2.6 - 16.0] |
| Heating Capacity Range | kW | 11.2 [2.4 - 13.0] | 14.0 [2.4 - 18.0] | 16.0 [2.4 - 19.0] |
| EER | | 4.15 | 3.60 | 3.40 |
| COP | | 4.40 | 4.05 | 3.72 |
| Maximum Operating Current | A | 16.50 | 16.50 | 16.50 |
| Dimensions - Indoor [H x W x D] | mm | 235 x 1586 x 690 | 235 x 1586 x 690 | 235 x 1586 x 690 |
| Dimensions - Outdoor [H x W x D] | mm | 1340 x 900 x 320 | 1340 x 900 x 320 | 1340 x 900 x 320 |
| Weight - Indoor / Outdoor | kg | 37 / 100 | 37 / 103 | 37 / 100 |
| Airflow [H / M / L] | l/s | 516 / 375 / 283 44 | 566 / 425 / 333 | 566 / 458 / 350 |
| Sound Pressure Level Indoor / Outdoor | dB(A) | / 51 | 46 / 53 | 46 / 58 |
| Operating Range Cooling | | -15 to 52 | -15 to 52 | -15 to 52 |
| Operating Range Heating | °C db | -20 to 24 | -20 to 24 | -20 to 24 |
| Pipe Sizes (Liquid / Gas) | mm | 9.52 / 15.88 | 9.52 / 15.88 | 9.52 / 15.88 |
| Maximum Pipe Length / Lift | m | 75 / 30 | 75 / 30 | 75 / 30 |
| Maximum Pre-charged Length | | 30 | 30 | 30 |
| Power Supply | Ph / V / Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz | 3ph / 380-415V / 50Hz |

Refer to the Engineering Databook for details on these conditions and requirements.

Rate conditions: Cooling: Indoor 27 °C Dry Bulb / 19 °C Wet Bulb, Outdoor 35 °C Dry Bulb.

Heating: Indoor 20 °C Dry Bulb, Outdoor 7 °C Dry Bulb / 6 °C Wet Bulb.

Base on equivalent piping length of 7.5m and piping height difference of 0m.

CONTROLS AT YOUR FINGERTIPS

BACKLIT WIRED CONTROLLER

The new model RBC-AMSU52-ES wired controller incorporates dual set point control, refrigerant leak detection indication, a 7-Day Timer, a multi-language LCD display with backlight, soft cooling, energy-saving options, and a return back function.



RBC-AMSU52-ES

KEY FEATURES:

- Schedule Timer
- Dual set point
- Leak detection indication
- Energy saving operation
- Night operation (selected models)
- Temperature increments of 0.5°C

LC WIFI MODULE

The new Light Commercial Wifi module incorporates all the functionality of your connected AC. Use the Wifi in conjunction with your wired wall controller or stand alone. Using residential products with any Light commercial, you only need one smartphone application.



BMS-IWF0010UCP-E

KEY FEATURES:

- LC & VRF FCU are connectable
- Toshiba Homes AC app
- 1:1 connection for IF & AC
- Direct connection with FCU & Dual connection
- Multiple control upto 16 AC indoors
- Maximum 5 users



INFRARED RECEIVER /REMOTE CONTROLLER RBC-AX33CE

Wireless infrared remote controller with receiver unit. The receiver is suitable for all types of units but is especially targeted to enable ducted units installed in ceiling voids to receive a wireless signal.

FUNCTIONS:

- On/Off
- Compact button layout
- Temperature sensor
- Fan speed
- Fault codes
- Unit setup
- Button restrictions

STANDARD WIRELESS REMOTE CONTROLLER RBC-AXU31-E/RBC-AX31UM-E

Wireless remote controller with a standalone discrete receiver, making it easily accessible with added flexibility of placement.

FUNCTIONS:

- Easy to use controller
- Start / Stop
- Operational mode change
- Temperature setting
- Airflow change
- Timer function
- Check code display

BACKLIT WIRED CONTROLLER RBC-AMSU51-ES

The ultimate local controller with a built-in 7-day timer, large screen, and menu.

FUNCTIONS:

- On/Off
- Operation mode
- Dual set point
- Fan speed
- Louvres
- Return back
- Energy savings
- Frost protection
- Soft cooling
- Leak detection
- Fault codes

COMPACT WIRED CONTROLLER RBC-ASCU11-E

Back to basics with this remote controller, offering all the standard functionalities, with compact dimensions and a large screen.

FUNCTIONS:

- On / Off
- Operation mode
- Temperature setting
- Fan speed
- Louvres
- Fault codes
- Unit setup



ADVANCED CONTROLS

TOSHIBA



64 CENTRAL CONTROLLER TCB-SC640U-E

This standard central controller allows easy control and simple monitoring of up to 64 indoor units through its easy touch panel operation.

FUNCTIONS:

- Full control of up to 64 units
- Individual indoor unit, group (up to 10 groups)
- Simple and intuitive interface with user-friendly menus
- On/Off, operation mode, temperature, fan speed
- Large backlit display
- Touch-sensitive keys
- Embedded digital outputs
- Schedule timer



128 SMART MANAGER BMS-SM1281ETLE

This Smart Manager has the ability to control from a local area network with a dedicated interface accessible from any web browser.

FUNCTIONS:

- On / Off
- Temperature setting
- Error display
- Schedule timer
- Web connection
- Energy monitoring
- Error information transfer function by Email



256 TOUCH SCREEN CONTROLLER BMS-CT2560U-E

This controller is ideally suited to any small or large installation where energy monitoring functions are required.

FUNCTIONS:

- Full control of a maximum of 256 units
- 7" Colour touch screen
- Intuitive navigation
- Advanced scheduling of indoor and outdoor units
- Energy monitoring with or without a power meter
- Embedded input and output
- Dedicated fault code menu with email transfer capability



ZONING WITH T-ZONE

For times when you only want to condition certain spaces, zoning can be the answer. Whether you are looking at installing a new Toshiba ducted system or have an existing system retrofitted, zoning can save energy, and reduce wear and tear of your system.

T-Zone gives you total temperature control of each space individually. With up to 14 zones capability, every space can be at the perfect temperature at all times.



SMART DEVICE CONTROL [WiFi] BMS-IWF0320E

A versatile interface for Toshiba light commercial and VRF air conditioning units that enables WiFi connection.

FUNCTIONS:

- Remote access via app on a smart device
- On/Off
- Temperature setting
- Fan speed
- Timer function
- Schedule function
- Energy save function
- Permit/Prohibit function
- Error display
- Room temperature monitoring

Toshiba is committed to continuously improving its product to ensure the highest quality and reliability standards are met, and to meet local regulations and market requirements.

The specifications on this document may change without notice to allow Toshiba to incorporate the latest products and innovations for its customers. The information contained in this brochure are merely informative, they are not intended to be used in place of the Engineering or Installation Manuals.

Cooling and heating capacities mentioned for the products are nominal capacities at standard operating conditions.

All images provided in this document are used for illustration purposes only.

Equipment rates in accordance with MEPS GEMS 2019 Determination.

AHIC [New Zealand] Pty Ltd, the importer and distributor of Toshiba branded heat pump systems declines any responsibility in the broadcast sense, for damage, direct or indirect, arising from the use and interpretation of the recommendation in this document.

customer.services@ahi-carrier.co.nz

Auckland Head Office
207-211 Station Road Penrose,
Auckland
Tel: 09 355 6720

Napier Branch
31 Ford Road
Napier
Tel: 06 561 0183

Wellington Branch
Cnr Jarden Mile & McCormack
Place Ngauranga, Wellington
Tel: 04 473 5985

Christchurch Branch
23 Iversen Terrace Waltham,
Christchurch
Tel: 03 379 0894

Dunedin Branch
56 Fox Street
Dunedin
Tel: 03 552 0401

